



안전인증서 Safety Certificate

안전인증번호: HU10953-18004A
(Certificate No.)

제조업자/수입업자명: Shenzhen MYIXI Power Supply Co., Ltd.
(Manufacturer/importer)

주소: 9 Floor C Building, Henghui Science and Technology Park, No.63 Yu Xing Road, Gongming Street, Guangming New District, Shenzhen, China
(Address)

제품명: 직류전원장치
(Product)

기본모델명: MYK-1404642
(Basic Model)

파생모델명 (Series Model):

- | | |
|-------------|-------------|
| MYX-0903000 | MYX-0903500 |
| MYX-0904000 | MYX-0905000 |
| MYX-0905333 | MYX-0905500 |
| MYX-0906000 | MYX-0953000 |
| MYX-0953789 | 이면기재 |

정격/안전기준상의 모델구분: 100-240 V~, 50/60 Hz, 1.5 A Max (O/P: 14 Vdc, 4.642 A)
(Rating)

시험기준: K 60950-1(2011-12)
(Standard)

본 인증서는 제조국명: 중국
 제조업자명: Shenzhen MYIXI Power Supply Co., Ltd.
 제조공장의 주소: 9 Floor C Building, Henghui Science and Technology Park, No.63 Yu Xing Road, Gongming Street, Guangming New District, Shenzhen, China
 의 제품에만 해당함

「전기용품 및 생활용품 안전관리법 시행규칙」 제9조제2항·제4항 또는 제10조제2항에 따라 안전인증서를 발급합니다.
We issue this Safety Certificate for the above appliances in accordance with the Article 9(2), 9(4) or 10(2) of the Enforcement Rule of the Electrical Appliances and Consumer Products Safety Control Act.

2018 년 06 월 22 일
(Year) (Month) (Day)




한국기계전기전자시험연구원 Korea Testing Certification




※ 이 인증서는 「전기용품 및 생활용품 안전관리법」에 따른 제품의 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨부서류	1. 전기용품의 안전관리부품 및 재질목록 (List of Critical Components) 2. 기본모델·파생모델의 내용 (Descriptions of the basic and series model) 3. 안전인증의 변경 현황 (Revisions Status)
------	--



MYX-0955053
 MYX-1002500
 MYX-1003600
 MYX-1005000
 MYX-1054571
 MYX-1056000
 MYX-1103272
 MYX-1105454
 MYX-1155652
 MYX-1202500
 MYX-1203500
 MYX-1204500
 MYX-1205417
 MYX-1255200
 MYX-1305000
 MYX-1354815
 MYX-1452483
 MYX-1501800
 MYX-1502200
 MYX-1503000
 MYX-1504000
 MYX-1552323
 MYX-1601875
 MYX-1604063
 MYX-1653939
 MYX-1682143
 MYX-1683571
 MYX-1702118
 MYX-1752057
 MYX-1801667
 MYX-1802667
 MYX-1803611
 MYX-1853514
 MYX-1902000
 MYX-1903158
 MYX-2001500
 MYX-2003250
 MYX-2103095
 MYX-2201636
 MYX-2301565
 MYX-2401200
 MYX-2401800
 MYX-2402200
 MYX-2402708

MYX-0956000
 MYX-1003000
 MYX-1004800
 MYX-1006000
 MYX-1055714
 MYX-1102727
 MYX-1104363
 MYX-1153130
 MYX-1202200
 MYX-1203000
 MYX-1204000
 MYX-1205000
 MYX-1252880
 MYX-1302769
 MYX-1352667
 MYX-1402571
 MYX-1454483
 MYX-1502000
 MYX-1502500
 MYX-1503500
 MYX-1504333
 MYX-1554194
 MYX-1602250
 MYX-1652182
 MYX-1681786
 MYX-1682857
 MYX-1683869
 MYX-1703824
 MYX-1753714
 MYX-1802000
 MYX-1803334
 MYX-1851946
 MYX-1901500
 MYX-1902526
 MYX-1903421
 MYX-2002000
 MYX-2101714
 MYX-2201364
 MYX-2202955
 MYX-2302826
 MYX-2401500
 MYX-2402000
 MYX-2402500



기술 문서 Technical Document

page: 1 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

1. 기본모델 · 파생모델의 내용 (General Descriptions of Certified Products)

1.1 제품의 설명 (Product description)

인증제품의 개요는 다음과 같다.

(Information on certified basic model product is as follow)

구분(Section)	내용 (Description)
용도 (Normal use)	The apparatus designed to be used for converting AC main voltage to DC low voltage.
내부구조 (Internal construction)	The apparatus consists of Switching transformer, rectifying part etc.
외부구조 (External construction)	Providing with plastic fire enclosure having min.V-1 flammability and appliance inlet.
기타(Others)	Class I.

1.2 전기용품의 표시: 전기용품 및 생활용품 안전관리법 시행규칙 제19조(안전인증의 표시)에 따라 표시한다.
(Marking of KC Mark: Marking shall comply with the Article 19 of the Enforcement Rule of the Electrical Appliances and Consumer Products Safety Control Act.)

1.3 등록모델 (Registered Models)

구분 (Class)	모델명 및 정격 (Model / Rating)	기본모델과의 차이점 (Difference between basic model and series model)
기본모델 (Basic model)	MYK-1404642 100-240 V~, 50/60 Hz, 1.5 A Max (O/P: 14 Vdc, 4.642 A)	
파생모델 (Series model)	MYX-0903000	Identical to basic model except for model designation and output rating (9Vdc 3A)
	MYX-0903500	Identical to basic model except for model designation and output rating (9Vdc 3.5A)
	MYX-0904000	Identical to basic model except for model designation and output rating (9Vdc 4A)
	MYX-0905000	Identical to basic model except for model designation and output rating (9Vdc 5A)

[서식 CP401-18-00]



기술 문서 Technical Document

page: 2 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-0905333	Identical to basic model except for model designation and output rating (9Vdc 5.333A)
MYX-0905500	Identical to basic model except for model designation and output rating (9Vdc 5.5A)
MYX-0906000	Identical to basic model except for model designation and output rating (9Vdc 6A)
MYX-0953000	Identical to basic model except for model designation and output rating (9.5Vdc 3A)
MYX-0953789	Identical to basic model except for model designation and output rating (9.5Vdc 3.789A)
MYX-0955053	Identical to basic model except for model designation and output rating (9.5Vdc 5.053A)
MYX-0956000	Identical to basic model except for model designation and output rating (9.5Vdc 6A)
MYX-1002500	Identical to basic model except for model designation and output rating (10Vdc 2.5A)
MYX-1003000	Identical to basic model except for model designation and output rating (10Vdc 3A)
MYX-1003600	Identical to basic model except for model designation and output rating (10Vdc 3.6A)
MYX-1004800	Identical to basic model except for model designation and output rating (10Vdc 4.8A)
MYX-1005000	Identical to basic model except for model designation and output rating (10Vdc 5A)
MYX-1006000	Identical to basic model except for model designation and output rating (10Vdc 6A)

[서식 CP401-18-00]



기술문서 Technical Document

page: 3 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-1054571	Identical to basic model except for model designation and output rating (10.5Vdc 4.751A)
MYX-1055714	Identical to basic model except for model designation and output rating (10.5Vdc 5.714A)
MYX-1056000	Identical to basic model except for model designation and output rating (10.5Vdc 6A)
MYX-1102727	Identical to basic model except for model designation and output rating (11Vdc 2.727A)
MYX-1103272	Identical to basic model except for model designation and output rating (11Vdc 3.272A)
MYX-1104363	Identical to basic model except for model designation and output rating (11Vdc 4.363A)
MYX-1105454	Identical to basic model except for model designation and output rating (11Vdc 5.454A)
MYX-1153130	Identical to basic model except for model designation and output rating (11.5Vdc 3.13A)
MYX-1155652	Identical to basic model except for model designation and output rating (11.5Vdc 5.652A)
MYX-1202200	Identical to basic model except for model designation and output rating (12Vdc 2.2A)
MYX-1202500	Identical to basic model except for model designation and output rating (12Vdc 2.5A)
MYX-1203000	Identical to basic model except for model designation and output rating (12Vdc 3A)
MYX-1203500	Identical to basic model except for model designation and output rating (12Vdc 3.5A)

[서식 CP401-18-00]



기술 문서 Technical Document

page: 4 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-1204000	Identical to basic model except for model designation and output rating (12Vdc 4A)
MYX-1204500	Identical to basic model except for model designation and output rating (12Vdc 4.5A)
MYX-1205000	Identical to basic model except for model designation and output rating (12Vdc 5A)
MYX-1205417	Identical to basic model except for model designation and output rating (12Vdc 5.417A)
MYX-1252880	Identical to basic model except for model designation and output rating (12.5Vdc 2.88A)
MYX-1252200	Identical to basic model except for model designation and output rating (12.5Vdc 5.2A)
MYX-1302769	Identical to basic model except for model designation and output rating (13Vdc 2.769A)
MYX-1305000	Identical to basic model except for model designation and output rating (13Vdc 5A)
MYX-1352667	Identical to basic model except for model designation and output rating (13.5Vdc 2.667A)
MYX-1354815	Identical to basic model except for model designation and output rating (13.5Vdc 4.815A)
MYX-1402571	Identical to basic model except for model designation and output rating (14Vdc 2.571A)
MYX-1452483	Identical to basic model except for model designation and output rating (14.5Vdc 2.483A)
MYX-1454483	Identical to basic model except for model designation and output rating (14.5Vdc 4.483A)

[서식 CP401-18-00]



기술문서 Technical Document

page: 5 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-1501800	Identical to basic model except for model designation and output rating (15Vdc 1.8A)
MYX-1502000	Identical to basic model except for model designation and output rating (15Vdc 2A)
MYX-1502200	Identical to basic model except for model designation and output rating (15Vdc 2.2A)
MYX-1502500	Identical to basic model except for model designation and output rating (15Vdc 2.5A)
MYX-1503000	Identical to basic model except for model designation and output rating (15Vdc 3A)
MYX-1503500	Identical to basic model except for model designation and output rating (15Vdc 3.5A)
MYX-1504000	Identical to basic model except for model designation and output rating (15Vdc 4A)
MYX-1504333	Identical to basic model except for model designation and output rating (15Vdc 4.333A)
MYX-1552323	Identical to basic model except for model designation and output rating (15.5Vdc 2.323A)
MYX-1554194	Identical to basic model except for model designation and output rating (15.5Vdc 4.194A)
MYX-1601875	Identical to basic model except for model designation and output rating (16Vdc 1.875A)
MYX-1602250	Identical to basic model except for model designation and output rating (16Vdc 2.25A)
MYX-1604063	Identical to basic model except for model designation and output rating (16Vdc 4.063A)

[서식 CP401-18-00]



기술 문서 Technical Document

page: 6 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-1652182	Identical to basic model except for model designation and output rating (16.5Vdc 2.182A)
MYX-1653939	Identical to basic model except for model designation and output rating (16.5Vdc 3.939A)
MYX-1681786	Identical to basic model except for model designation and output rating (16.8Vdc 1.786A)
MYX-1682143	Identical to basic model except for model designation and output rating (16.8Vdc 2.143A)
MYX-1682857	Identical to basic model except for model designation and output rating (16.8Vdc 2.857A)
MYX-1683571	Identical to basic model except for model designation and output rating (16.8Vdc 3.571A)
MYX-1683869	Identical to basic model except for model designation and output rating (16.8Vdc 3.869A)
MYX-1702118	Identical to basic model except for model designation and output rating (17Vdc 2.118A)
MYX-1703824	Identical to basic model except for model designation and output rating (17Vdc 3.824A)
MYX-1752057	Identical to basic model except for model designation and output rating (17.5Vdc 2.057A)
MYX-1753714	Identical to basic model except for model designation and output rating (17.5Vdc 3.714A)
MYX-1801667	Identical to basic model except for model designation and output rating (18Vdc 1.667A)
MYX-1802000	Identical to basic model except for model designation and output rating (18Vdc 2A)

[서식 CP401-18-00]



기술 문서 Technical Document

page: 7 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-1802667	Identical to basic model except for model designation and output rating (18Vdc 2.667A)
MYX-1803334	Identical to basic model except for model designation and output rating (18Vdc 3.334A)
MYX-1803611	Identical to basic model except for model designation and output rating (18Vdc 3.611A)
MYX-1851946	Identical to basic model except for model designation and output rating (18.5Vdc 1.946A)
MYX-1853514	Identical to basic model except for model designation and output rating (18.5Vdc 3.514A)
MYX-1901500	Identical to basic model except for model designation and output rating (19Vdc 1.5A)
MYX-1902000	Identical to basic model except for model designation and output rating (19Vdc 2A)
MYX-1902526	Identical to basic model except for model designation and output rating (19Vdc 2.526A)
MYX-1903158	Identical to basic model except for model designation and output rating (19Vdc 3.158A)
MYX-1903421	Identical to basic model except for model designation and output rating (19Vdc 3.421A)
MYX-2001500	Identical to basic model except for model designation and output rating (20Vdc 1.5A)
MYX-2002000	Identical to basic model except for model designation and output rating (20Vdc 2A)
MYX-2003250	Identical to basic model except for model designation and output rating (20Vdc 3.25A)

[서식 CP401-18-00]



기술문서 Technical Document

page: 8 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-2101714	Identical to basic model except for model designation and output rating (21Vdc 1.714A)
MYX-2103095	Identical to basic model except for model designation and output rating (21Vdc 3.095A)
MYX-2201364	Identical to basic model except for model designation and output rating (22Vdc 1.364A)
MYX-2201636	Identical to basic model except for model designation and output rating (22Vdc 1.636A)
MYX-2202955	Identical to basic model except for model designation and output rating (22Vdc 2.955A)
MYX-2301565	Identical to basic model except for model designation and output rating (23Vdc 1.565A)
MYX-2302826	Identical to basic model except for model designation and output rating (23Vdc 2.826A)
MYX-2401200	Identical to basic model except for model designation and output rating (24Vdc 1.2A)
MYX-2401500	Identical to basic model except for model designation and output rating (24Vdc 1.5A)
MYX-2401800	Identical to basic model except for model designation and output rating (24Vdc 1.8A)
MYX-2402000	Identical to basic model except for model designation and output rating (24Vdc 2A)
MYX-2402200	Identical to basic model except for model designation and output rating (24Vdc 2.2A)
MYX-2402500	Identical to basic model except for model designation and output rating (24Vdc 2.5A)

[서식 CP401-18-00]



기 술 문 서
Technical Document

page: 9 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

MYX-2402708

Identical to basic model except
for model designation and output
rating (24Vdc 2.708A)

[서식 CP401-18-00]



기술 문서 Technical Document

page: 10 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

2. 안전관리 부품 및 재질목록(List of Critical Components)

부품명(회로기호) Components(Part no.)	제조사(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Plastic Enclosure	SABIC INNOVATIVE PLASTICS US L L C	SE1(f1)	V-1, 105 ℃, min. thickness 1.5 mm	UL
Plastic Enclosure (Alt)	SABIC JAPAN L L C	SE1	V-1, 105 ℃, min. thickness 1.5 mm	UL
PCB	Interchangeable	Interchangeable	V-0 or better, min. 130 ℃	UL
Appliance inlet (CON1)	Zhejiang Leci Electronics	DB-14	10 A, 250 Vac	IEC
Appliance inlet (CON1) (Alt)	Yueqing Yanhui Electronic Co Ltd	DB-14	10 A, 250 Vac	IEC
Appliance inlet (CON1) (Alt)	SHENZHEN KANGYONGDA ELECTRONICS CO LTD	DE-14	10 A, 250 Vac	IEC
Fuse (FS1)	DONGGUAN REOMAX ELECTRONICS TECHNOLOGY CO LTD	TBP	T3.15 A, 250 V	IEC
Fuse (FS1) (Alt)	HONG HU BLUELIGHT ELECTRONIC CO LTD	L3T	T3.15 A, 250 V	IEC
Fuse (FS1) (Alt)	DONGGUAN HONGDA ELECTRONIC TECHNOLOGY CO LTD	31TD	T3.15 A, 250 V	IEC
Chock (LF2)	SHENZHEN MYIXI POWER SUPPLY CO LTD	T18*10*7	130 ℃	-
Chock (LF1)	SHENZHEN MYIXI POWER SUPPLY CO LTD	T10*6*5	130 ℃	-
Photocoupler (U2)	Bright Led Electronics Corp.	BPC-817	Dti = 0.4 mm, Int. dcr = 5.0 mm, Ext. dcr = 8.0 mm	VDE, UL
Photocoupler (U2) (Alt)	LITE-ON TECHNOLOGY CORP	LTV-817	Dti = 0.8 mm, Int. dcr = 5.2 mm, Ext. dcr = 7.8 mm	VDE, UL

[서식 CP401-18-00]



기술 문서 Technical Document

page: 11 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

부품명(회로기호) Components(Part no.)	제조사(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Photocoupler (U2) (Alt)	EVERLIGHT ELECTRONICS CO LTD	EL817	Dti = 0.4 mm, Int. dcr = 6.0 mm, Ext. dcr = 7.7 mm	VDE, UL
Photocoupler (U2) (Alt)	SHENZHEN ORIENT COMPONENTS CO LTD	ORPC-817B	Dti = 0.5 mm, Int. dcr = 4.6 mm, Ext. dcr = 6.4 mm	VDE, UL
Electrolytic Capacitor (C1)	Interchangeable	Interchangeable	Max. 120uF, min. 400 V, 105 °C	-
Bleeder resistor (RS1, RS2)	Interchangeable	Interchangeable	Max. 1.5 Mohm, min. 1/4 W.	-
X-Capacitor (CX1)	TENTA ELECTRIC INDUSTRIAL CO LTD	MEX	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
X-Capacitor (CX1) (Alt)	Shenzhen Jinghao Capacitor Co., Ltd.	CBB62B	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
X-Capacitor (CX1) (Alt)	Shantou High-New Technology Developmnt Zone Songtian Enterprise Co Ltd	MPX	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
X-Capacitor (CX1) (Alt)	SHENZHEN YIMANFENG SCIENCE AND TECHNOLOGY CO LTD	MPX/MKP	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
X-Capacitor (CX1) (Alt)	DAIN ELECTRONICS CO LTD	MPX	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
X-Capacitor (CX1) (Alt)	Fuxin Pan Ocean Electronic Ltd.	MPX	Max. 0.33 uF, min. 250 Vac, X2 type	IEC
Y-Capacitor (CY1)	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	CD	Max. 1000 pF, Min. 250 Vac, Y1 type	IEC
Y-Capacitor (CY1) (Alt)	JYH HSU (JEC) ELECTRONICS LTD	JD	Max. 1000 pF, Min. 250 Vac, Y1 type	IEC
Y-Capacitor (CY1) (Alt)	HSUAN TAI ELECTRONICS CO LTD	CY	Max. 1000 pF, Min. 250 Vac, Y1 type	IEC
Varistor (MOV1)	Joyin Company Ltd.	10N471K	Min 300 V, Coating V-0, 6kV/3kA combination pulse test	VDE, UL

[서식 CP401-18-00]



기술 문서 Technical Document

page: 12 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

부품명(회로기호) Components(Part no.)	제조사(상표명) Manufacturer(Brand)	모델명(형식) Model(Type)	정격 또는 특성 (Technical Data)	인증규격 (Certification)
Varistor (MOV1) (Alt)	Centra Science Corp.	CNR-10D471K	Min 300 V, Coating V-0, 6kV/3kA combination pulse test	VDE, UL
Varistor (MOV1) (Alt)	Cerglass MFG Inc	10D471K	Min 300 V, Coating V-0, 6kV/3kA combination pulse test	VDE, UL
Varistor (MOV1) (Alt)	GUANGDONG FENGHUA ADVANCED TECHNOLOGY HOLDING CO LTD. XIANHUA NEW SENSITIVE COMPONENTS BRANCH	FNR-10K471	Min 300 V, Coating V-0, 6kV/3kA combination pulse test	VDE, UL
Varistor (MOV1) (Alt)	Thinking Electronic Industrial Co., Ltd.	TVR10471-M	Min 300 V, Coating V-0, 6kV/3kA combination pulse test	VDE, UL
Transformer (T1)	Shenzhen Belta Electronics Co Ltd	MYX-PQ262065W 12R:C	Class B	-
Transformer (T1) (Alt)	Shenzhen mediatek teng technology co., LTD	MYX-PQ262065W 12R:C	Class B	-
Transformer (T1) (Alt)	DongGuan SuYang Electronic Technology co., LTD	MYX-PQ262065W 12R:C	Class B	-
Bobbin (of T1)	CHUANG CHUN PLASTICS CO LTD	T375J	Phenolic, V-0, 150 °C, min. thickness 0.51 mm	UL
Bobbin (of T1) (Alt)	SUMITOMO BAKELITE CO LTD	PM-9820	Phenolic, V-0, 150 °C, min. thickness 0.51 mm	UL
T.I.W (of T1)	Dah Jin Technology Co., Ltd.	TLW-B	130 °C	VDE, UL
T.I.W (of T1)	Young Chang Silicone Co Ltd	STW-B	130 °C	VDE, UL
T.I.W (of T1)	Young Chang Silicone Co Ltd	TEX-E	130 °C	VDE, UL

[서식 CP401-18-00]



기술문서 Technical Document

page: 13 / 13

안전인증번호: HU10953 -18004A
(Certificate No)

접수번호: 20180504 - 0001
(Receipt No)

3. 전기용품안전인증의 변경현황(Status of Certificate Revisions)

일자(Date)	발급현황(Status of issues)
	변경내용(Modification of Contents)
2018/06/22	기본+파생모델등록(Basic + Series Model)

4. 기타(Carefully Informed Note)

- 1) 안전관리부품 및 재질목록에 기재된 사항은 안전에 직접적인 영향을 주는 부분이므로 내용을 변경 또는 복수등재를 원하는 경우 안전인증변경신청 또는 안전확인변경신고를 하여야 합니다. 안전인증변경신청 또는 안전확인변경신고를 하지 않고 임의로 변경하는 경우에는 전기용품 및 생활용품 안전관리법에 따라 행정조치 될 수 있습니다.

The certificate holder should apply for a revision of the certificate if the registered critical components are to be changed, modified or alternated. Should the contents of Certificate are altered without the application for the modification, the administrative measures can occur according to the Electrical Appliances and Consumer Products Safety Control Act.

- 2) 정기검사(시료채취포함)를 거부, 방해 또는 기피하는 경우에는 전기용품 및 생활용품 안전관리법 제11조에 따라 안전인증이 취소될 수 있습니다.

If Follow-up Factory Inspection, including sampling representative model by 11 categories of the certified product at factory-site for re-testing, should not has been arranged by Certificate holder, Safety Certification(KC Mark) may be withdrawn according to the Article 11 of the Electrical Appliances and Consumer Products Safety Control Act.

- 3) 공장주소(전화번호포함), 대표자, 상호 및 부품변경, 신고인정보 등 안전인증 또는 안전확인신고의 내용이 변경되었을 때, 안전인증변경신청 또는 안전확인변경신고를 하지 않을 경우에는 전기용품 및 생활용품 안전관리법에 따라 행정조치 될 수 있습니다.

Should a factory address, president name, manufacturer name and critical component are altered without the application for the modification, the administrative measures can occur according to the Electrical Appliances and Customer Products Safety Control Act.

- 4) 조건부 인증사항 (Conditional certification items):




기술문서붙임자료


안전인증번호: HU10953-18004A

접수번호: 20180504-0001

No.1 표시사항

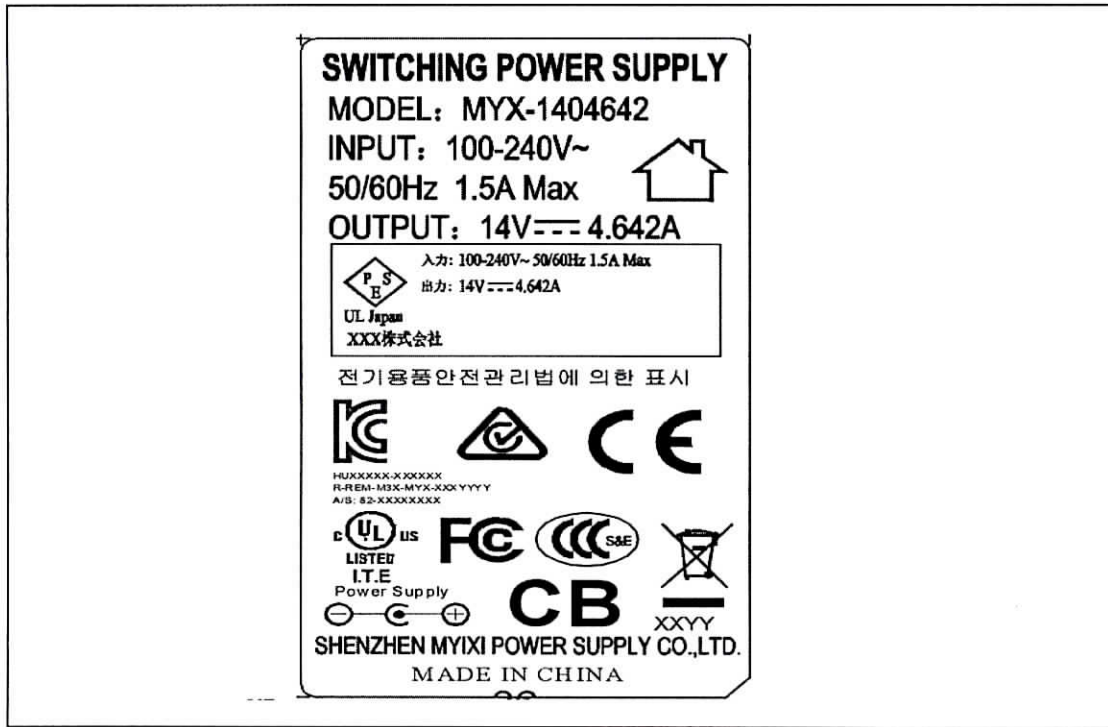

No.2 제품외관

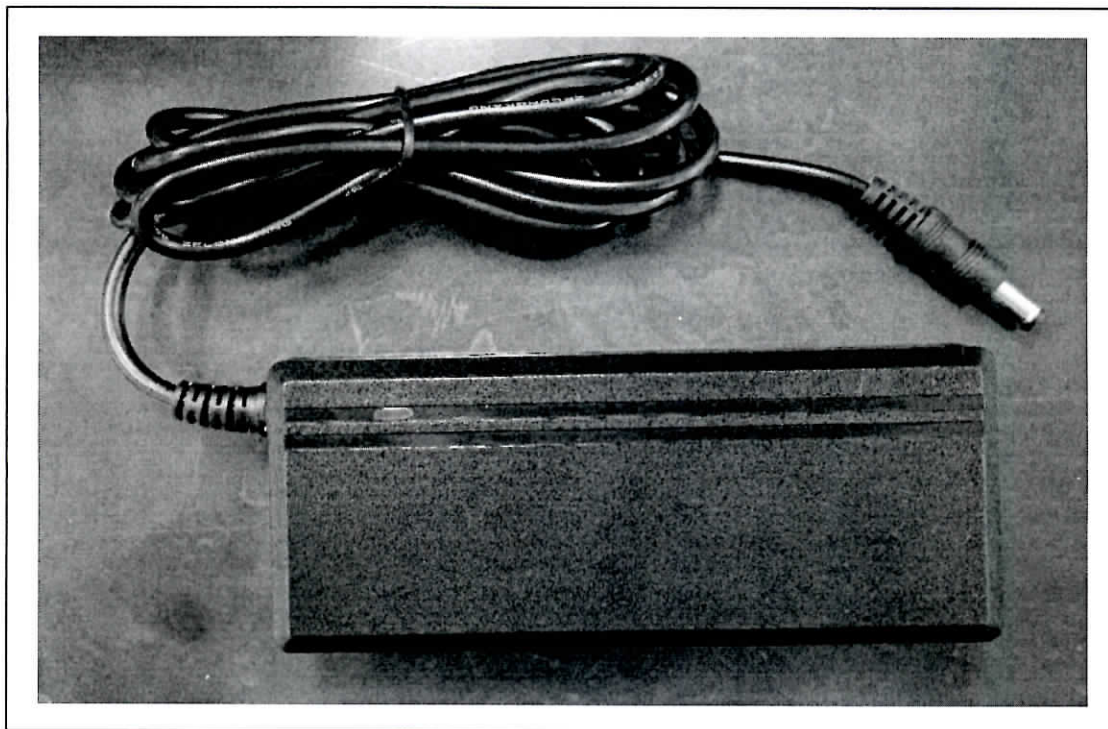


기술문서붙임자료


안전인증번호: HU10953-18004A

접수번호: 20180504-0001

No.3 제품외관

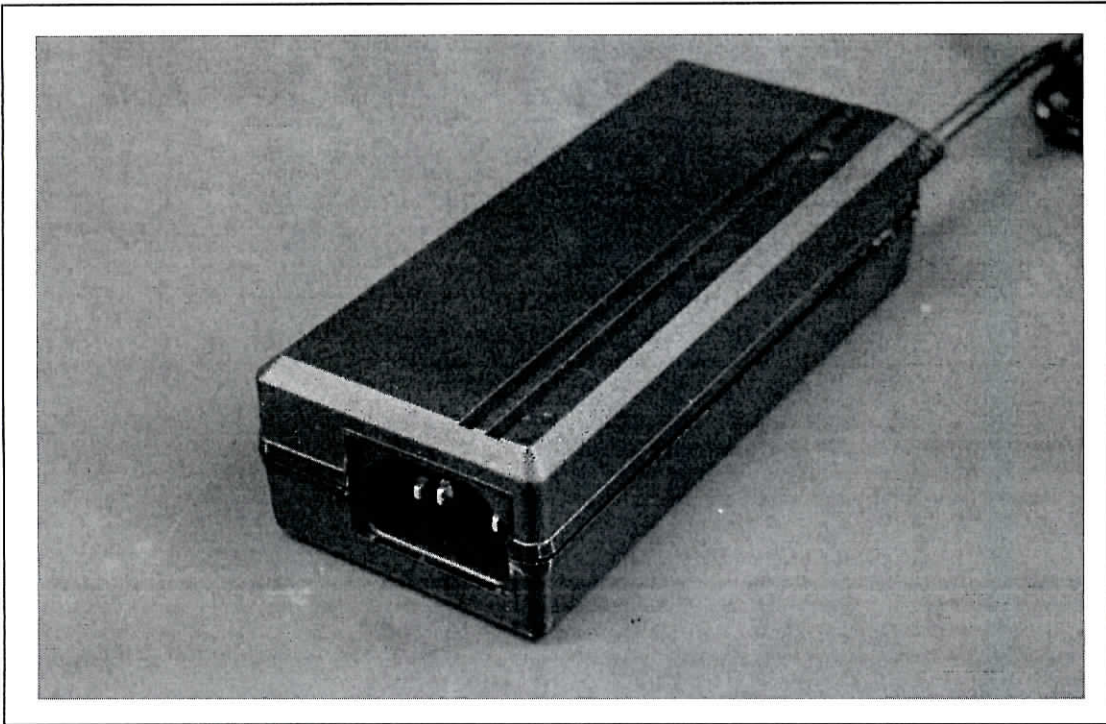

No.4 제품외관

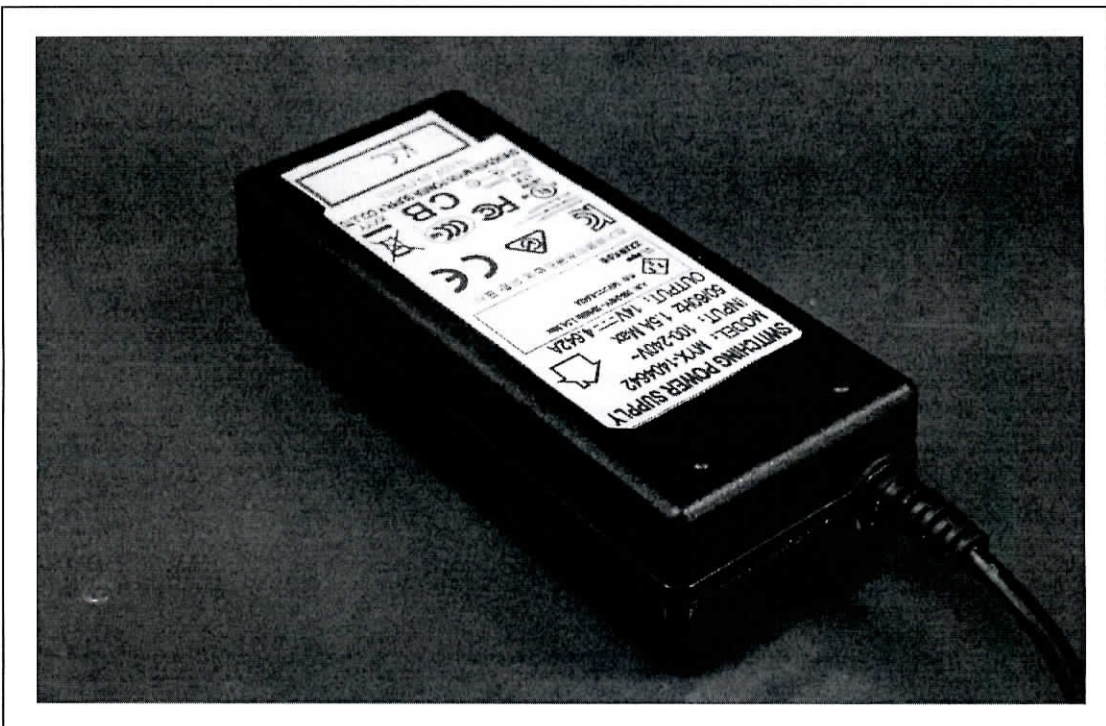


기술문서붙임자료


안전인증번호: HU10953-18004A

접수번호: 20180504-0001

No.5 제품내부

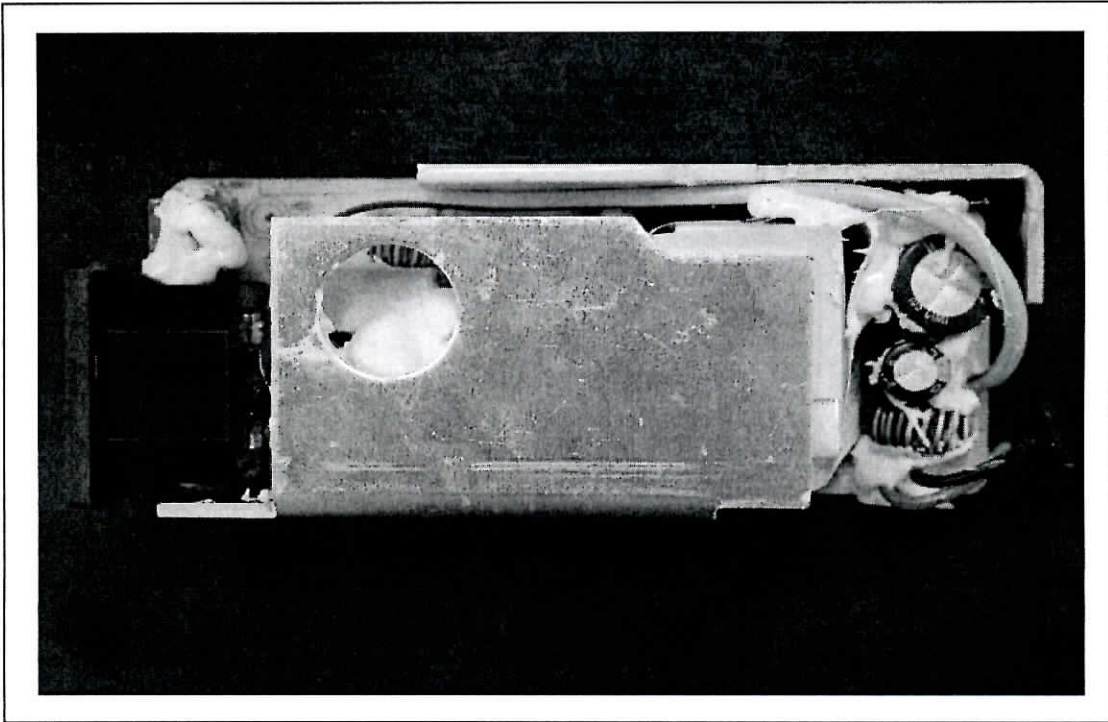

No.6 제품내부

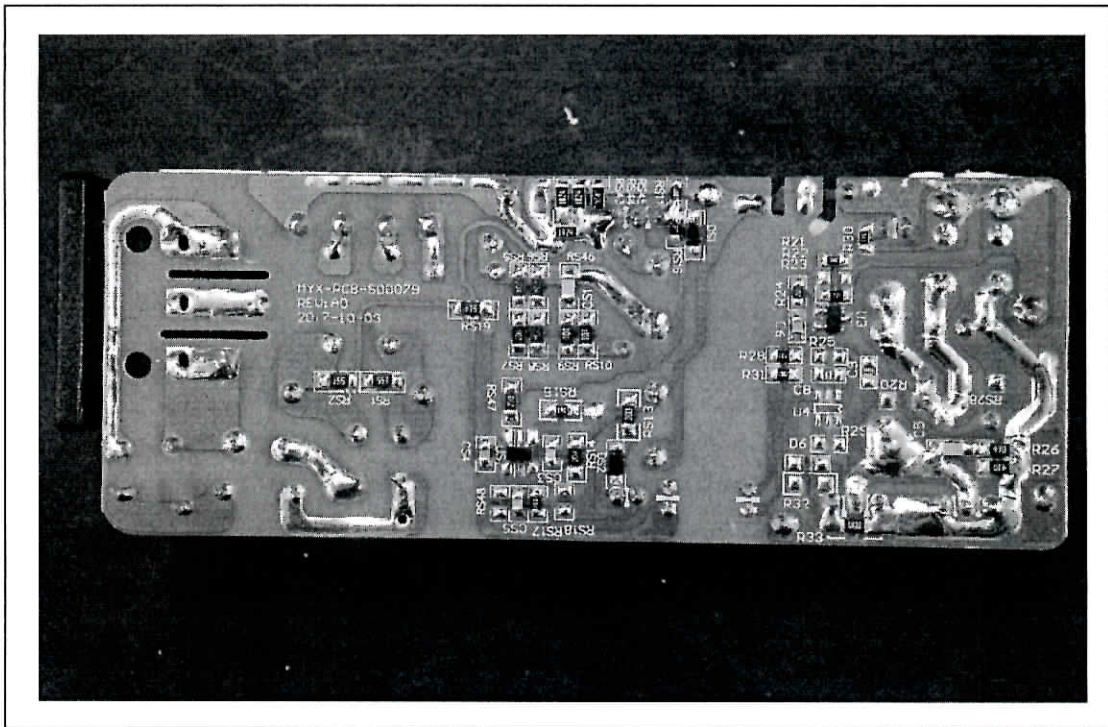

기술문서붙임자료

안전인증번호: HU10953-18004A

접수번호: 20180504-0001

No.7 제품내부 (Under Heatsink)

